

DUAL PUMP GUIDE-RAIL ARRANGEMENT



**We reserve the right to alter specification without prior notification
REF: G**

Dual Pump Guide-Rail Arrangement

Control Panel

Single or three phase, IP54 enclosure.
All panels include high level alarm.

Access Cover

Galvanised access frame and cover, 1000mm diameter tanks have 600mm² pedestrian weight covers, all other tanks have 900mm² 2.5 tonne cover.

GRP Tank

Corrosion resistant design with strengthening rings and lifting eyes.

Outlet

Female BSP thread
other options available.

Pipework

Internal valves and PVC pipework pre-installed in factory.

Pump Installation

Single or twin pump guide rail installations with lifting chain and shackle to enable easy removal of pumps.

Inlet


110mm or 160mm inlet in accordance with WIS 4-35-01, positioned to customers requirements.

Level Control

Single acting 'RDN' type sewage floatswitches offer simple reliable control.

Pumps

Single or three phase pumps with vortex or channel impellers.

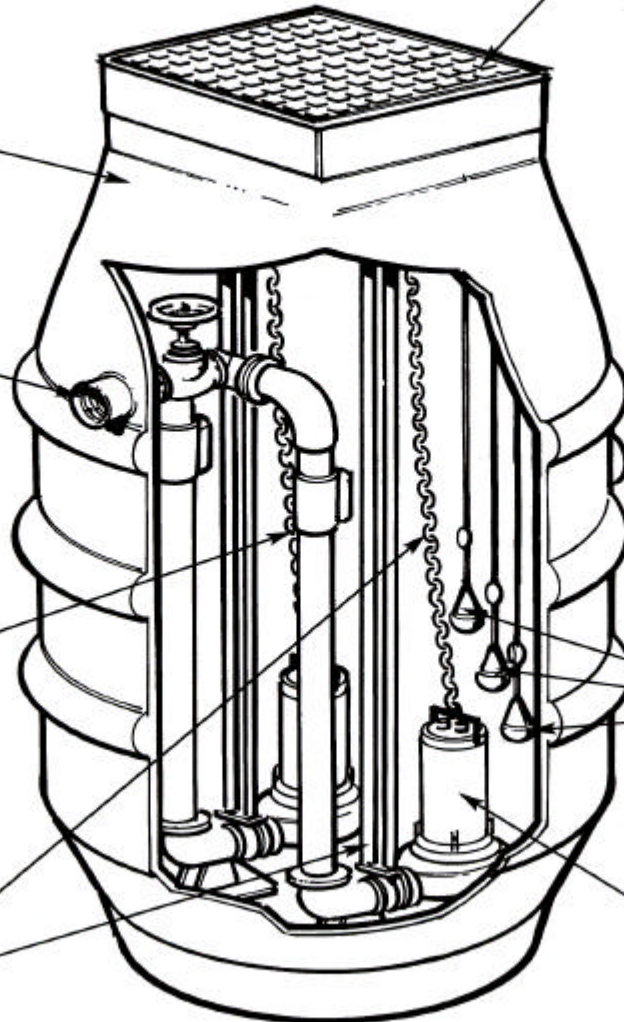

**We reserve the right to alter specification without prior notification
REF: G**